



Altec AT200AV

Telescopic Aerial Device



- **Working Height 35.9 ft (10.9 m)**
- **Side Reach 20.7 ft (6.3 m)**
- **Platform Offers Easy Access from Ground**
- **Low Travel Height**
- **Low Life-Cycle Cost**
- **350 lb (159 kg) Platform Capacity**

STANDARD FEATURES

- Two-Stage Telescopic Non-Insulated Aerial Device
- Hydraulically Extended Boom
- 370° Non-continuous Rotation
- Side-Mounted Gravity Leveled Crawl Thru Platform
24 x 24 x 42 in (610 x 610 x 1067 mm)
- Platform Capacity 350 lb (159 kg)
- Engine Start/Stop at Upper and Lower Controls
- 120 VAC Circuit in Boom With Outlets at the Platform
- Open Center Hydraulic System

RECOMMENDED FEATURES

- Fall Protection System
- Wheel Chocks

GENERAL SPECIFICATIONS

Ground to Bottom of Platform*	30.9 ft	9.4 m
Working Height	35.9 ft	10.9 m
Stowed Travel Height	9.8 ft	2.98 m
Platform Capacity	350 lb	159 kg
Boom Articulation	-13.5° to 80°	
Rotation	370° Non-continuous	
Weight of Unit	1610 lb	730 kg
Side Reach	20.7 ft	6.3 m

*Based on 40 inch (1016 mm) Chassis Frame Height

Altec Aerial Devices meet or exceed all applicable ANSI Standards as of the date of manufacture. Altec reserves the right to improve models and change specifications without notice or obligation.




Easy Platform Access from the Ground

OPTIONS

- Rectangular Walk-In Platform with Door
- Positive or Hydraulic Leveling
- Two Speed Controls
- Choice of Reservoirs: Bed-Mounted or Pedestal-Mounted
- Airline to Platform
- Interior Bridgemount Pedestal
- Canopy and Curtain Assembly
- Diagnostic Pressure Test Kit
- Emergency Operating System
- Emergency Lowering System
- Heater for Platform
- Seat for Platform
- Tool Pouches and Trays

REACH DIAGRAM

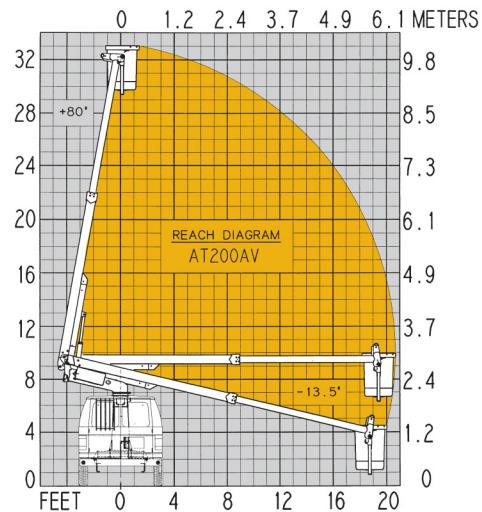

Optional Bridgemount Pedestal